LLP202-3C3C-BLK-180

Multi-band Surface Mount Antenna
2X Global LTE MiMo 694-3700MHz

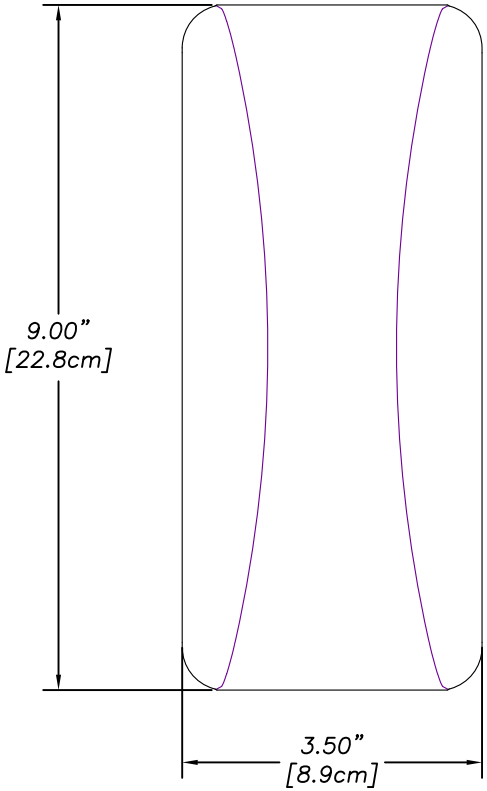

TOP VIEW

SIDE VIEW

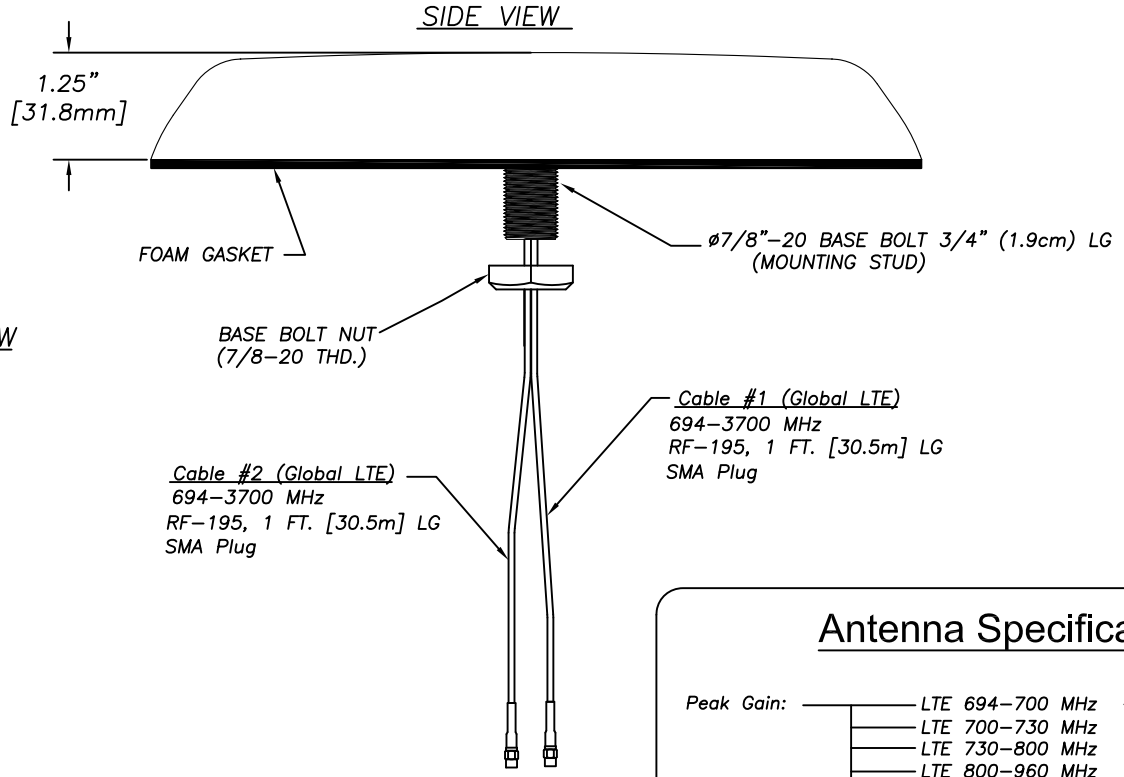

Antenna Specifications:

Peak Gain:	LTE 694–700 MHz –1dBi
	LTE 700–730 MHz 1dBi
	LTE 730–800 MHz 2dBi
	LTE 800–960 MHz 3dBi
	LTE 1710–3700 MHz 4dBi
VSWR:	< 2.5:1 VSWR over range
Maximum Power:	10 Watts
Impedance:	50 OHM Nominal
Cable:	1 Ft. (30.5cm) Low Loss 195 Type Cable (LTE)
Connector/Interface:	SMA Plugs (LTE)
Mounting:	Thru Hole, Ground Plane dependent
Shock & Vibration:	(Pending) IEEE1478, EN 61373, MIL–810G, TIA 329.2–C
Dust/Water Ingress:	(Pending) IP67
Operating Temperature:	–40° to +80° C

JM	2/16/17	A

MobileMark
antenna solutions

US OFFICE & HEADQUARTERS: 1140 W. THORNDALE AVE. ITASCA, IL 60143
TEL: (847) 671-6690 * FAX (847) 250-5120
UK OFFICE: 8 MIRAS BUS PARK, KEYS PARK ROAD. HEDNESFORD WS12 2FS, UK.
UK TEL: (+44) 1543-459555 FAX (+44) 1543-459545
VISIT OUR WEBSITE AT WWW.MOBILEMARK.COM

RoHS Compliant